




RPM	CODICE CODE	MODELLO MODEL	PORTATA FLOW				PRESSIONE PRESSURE		POTENZA POWER		PESO WEIGHT	PRESA DI FORZA SHAFT TYPE
			NOM.				bar	PSI	HP	kW		
			l/min	GPM	l/min	GPM						
1500	317600	HXR1-C 135/300 R	135.1	35.7	124.5	32.9	300	4350	95.8	71.4	181.0	R - Albero MASCHIO 50 mm DX R - MALE Shaft 50 mm RIGHT
	317300	HXR1-C 160/240 R	171.0	45.2	162.5	42.9	240	3480	100.0	74.5	181.0	
	317000	HXR1-C 200/200 R	211.1	55.8	206.0	54.4	200	2900	105.7	78.8	181.0	
	316700	HXR1-C 250/160 R	267.2	70.6	260.0	68.7	160	2320	106.8	79.6	181.0	
	316400	HXR1-C 310/130 R	330.0	87.2	323.3	85.4	130	1885	107.8	80.4	181.0	
	317900	HXR1-C 400/100 R	400.0	105.7	395.1	104.4	100	1450	101.3	75.5	181.0	
1800	317700	HXR1-D 135/300 R	135.1	35.7	124.5	32.9	300	4350	95.8	71.4	181.0	
	317400	HXR1-D 160/240 R	171.0	45.2	162.5	42.9	240	3480	100.0	74.5	181.0	
	317100	HXR1-D 200/200 R	211.1	55.8	206.0	54.4	200	2900	105.7	78.8	181.0	
	316800	HXR1-D 250/160 R	267.2	70.6	260.0	68.7	160	2320	106.8	79.6	181.0	
	316500	HXR1-D 310/130 R	330.0	87.2	323.3	85.4	130	1885	107.8	80.4	181.0	
	316200	HXR1-D 400/100 R	400.0	105.7	395.1	104.4	100	1450	101.3	75.5	181.0	
2200	317500	HXR1-M 135/300 R	135.1	35.7	124.5	32.9	300	4350	95.8	71.4	181.0	
	317200	HXR1-M 160/240 R	171.0	45.2	162.5	42.9	240	3480	100.0	74.5	181.0	
	316900	HXR1-M 200/200 R	211.1	55.8	206.0	54.4	200	2900	105.7	78.8	181.0	
	316600	HXR1-M 250/160 R	267.2	70.6	260.0	68.7	160	2320	106.8	79.6	181.0	
	316300	HXR1-M 310/130 R	330.0	87.2	323.3	85.4	130	1885	107.8	80.4	181.0	
	316000	HXR1-M 400/100 R	400.0	105.7	395.1	104.4	100	1450	101.3	75.5	181.0	



Tutti i modelli di Pompe sono disponibili con Presa di Forza Sinistra. Nel Modello compare "L". Esempio : HXR1-C 135/300 L  
All models of PUMPS are available with Left P.T.O. Shaft. Descriptions mention "L". For example : HXR1-C 135/300 L

**Dimensioni d'ingombro (mm) - Overall Dimensions (mm)**



In base alle esigenze dell'installatore, il Riduttore può essere installato nelle cinque posizioni 1,2,3,4,5 come illustrato.  
Esempio d'ordine: HXR1-C 135/300 R diventa HXR2-C 135/300 R.  
Per informazione su prezzi e codici per favore contattare l'azienda.

Depending on specific needs, the Gearbox can be mounted in five different Positions 1,2,3,4,5 as shown in the following picture.  
For example: HXR1-C 135/300 R becomes HXR2-C 135/300 R.  
For price and code information please contact us.

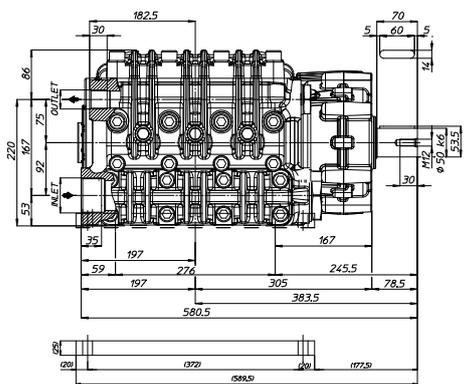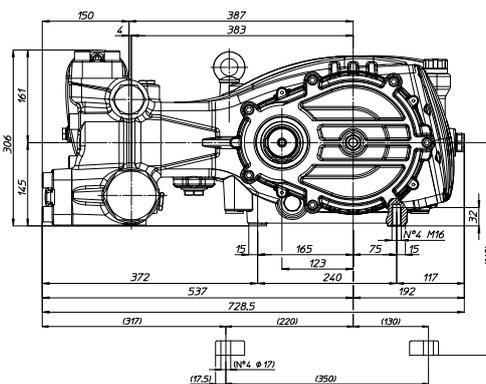

	INLET	OUTLET
135/300 R	G 2"	G 1"
160/240 R	G 2"	G 1"
200/200 R	G 2"	G 1"

	INLET	OUTLET
250/160 R	G 2 1/2"	G 1 1/4"
310/130 R	G 2 1/2"	G 1 1/4"
400/100 R	G 2 1/2"	G 1 1/4"